

ARTICWOOD

Made in Spain, the Articwood series boasts the timeless textures and warmth of wood captured in a durable porcelain tile.



national tiles


Available in 5 rustic colourways, Articwood is ideal for achieving the timber look without the cost and upkeep.

Basic Specifications:
Glazed porcelain
Matt finish
Floor and wall application
Size: 150mmx900mm
Pressed edge
Wet Pendulum: P2
Lifetime warranty*
Made in Spain
Exclusive to National Tiles





Amber

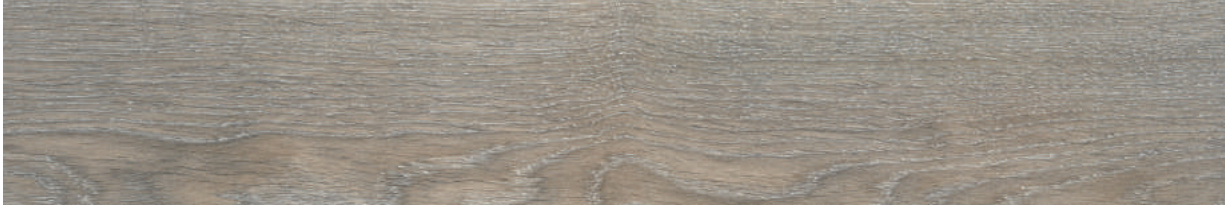

Argent



Camel



Ice Grey



Mocha

Also available in 230mmx1200mm - Rectified edge

*Special order sizes: min order, lead times apply.



SIZE		15 x 90 cms.		
GROUP		Bla.		
TYPE		Glazed Porcelain Tile		
TEST DESCRIPTION		TEST VALUE		STANDARD
WATER ABSORPTION		AA < 0,5%	CUMPLE PASSED	UNE-EN-ISO 10545-3
BREAKING STRENGTH		> 1300 N	CUMPLE PASSED	UNE-EN-ISO 10545-4
RESISTANCE OF FLEXION		> 35N/mm ²	CUMPLE PASSED	UNE-EN-ISO 10545-4
SURFACE ABRASION		CLASS	AMBER, MOCCHA PEI III REST PEI IV	UNE-EN-ISO 10545-7
CRACKING RESISTANCE		REQUESTED	CUMPLE PASSED	UNE-EN-ISO 10545-11
FROST RESISTANCE		REQUESTED	CUMPLE PASSED	UNE-EN-ISO 10545-12
CHEMICAL RESISTANCE	DOMESTIC & SWIMMING POOL PRODUCTS	MINIMUM GB	CUMPLE PASSED	UNE-EN-ISO 10545-13
ACID RESISTANCE		GHA	CUMPLE PASSED	UNE-EN-ISO 10545-13
ALKALINE RESISTANCE		GHA	CUMPLE PASSED	UNE-EN-ISO 10545-13
RESISTANCE TO STAINS		MINIMUM CLASS 3	CUMPLE PASSED	UNE-EN-ISO 10545-14
SLIP RESISTANCE		AVAILABLE -\$,4+*	CLASS 1	UNE-ENV 12633:2003
SLIP RESISTANCE		D.C.O.F.	> 0.42 (0,54)	ANSI A137. 1:2012.9.6
HARDNESS (MOHS)		MINIMUM 3	CUMPLE PASSED	EN 101

tech specs